


TURF-AIRE®

Tine Installation

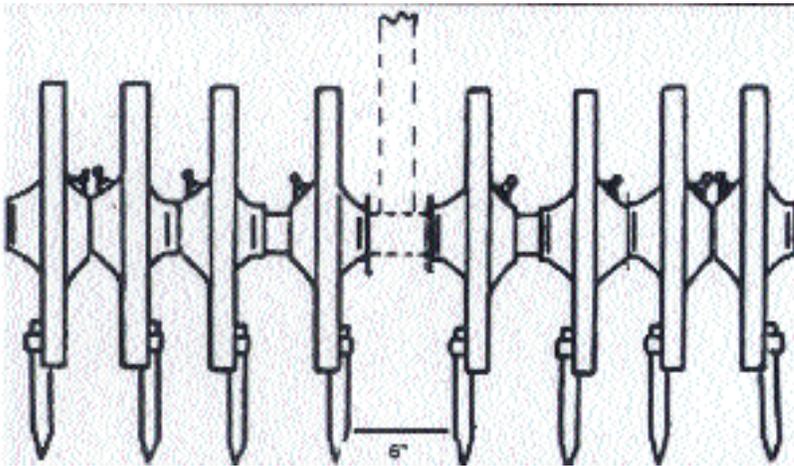


48" Unit


1. Secure unit on jack stands.
2. Attach 3/4" coring tines to wheels using two 3/8" bolts, flange nuts and tine clamps.
3. Bolt tines to inside of all tine wheels except the outside wheels which will be bolted to the outside of the wheel.
4. Opening of tines must face rear of unit.

Warning!

- Tines are very sharp and could cut hands.
- When working with the wheels always wear protective gear such as gloves or other hand protection.
- Always remove the tines from the aerator before replacing the axle.

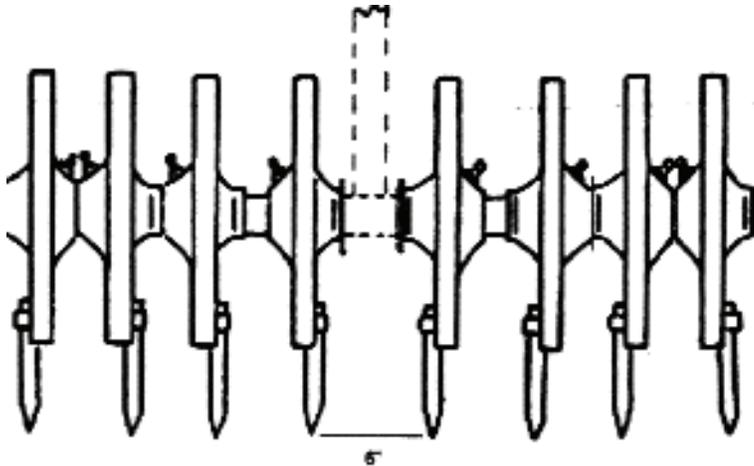

60" Unit

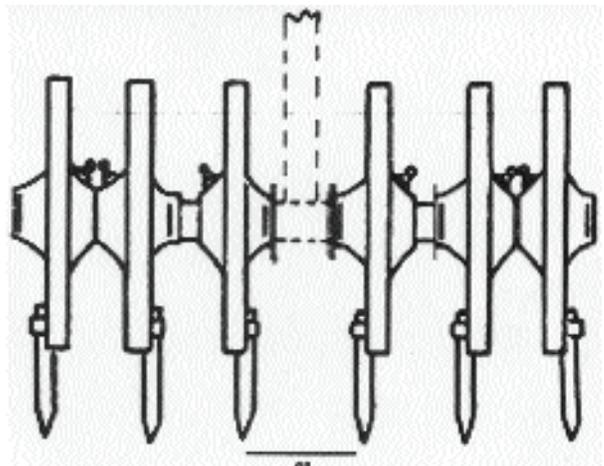

36" Unit

Bishop Enterprises Inc.

9033 Shelbyville Highway,
Bell Buckle, TN 37020

Phone: 615-793-6052 or 800-854-4851

Fax: 800-888-0457

www.turf-aire.com